

- Ideal for moving bottles and metal cans at high speeds

- Smooth surface with no backlash
- Non knurled pin


- Materials:

Plates: low friction acetal

Pin: stainless steel 304

- Operating temp.: -40°C to +85°C (+70°C in humid environments)

- Length 3048mm (80 plates)


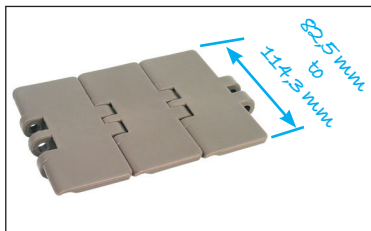


Advantages


- In most applications no lubrication is necessary

Associated products

- Drive sprocket **PT820**
- Idler sprocket **PR820**
- Idler **DBL820**



Direction of travel →



DISCOUNTS

Qty.	1+	5+	10+
Disc.	List	-5%	On request

Part number	Width K (mm)	Length (mm)	Breaking load (N)	Weight (kg/m)	Price each 1 to 4
CAP820-82	82,5	3048	3200	0,83	80,63 €
CAP820-114	114,3	3048	3200	1,03	102,69 €

Dimensions in mm

Altri prodotti...



GAL21

Ruota per trasportatore, Plastica



GGP

Vite ad alette, Tecnopolimero con inserto in acciaio



PRFSRAD

Sistema di chiusura per profili alluminio, Serratura doppia rapida a...



NKX

Cuscinetto combinato senza anello interno, Needle and roller bearings



NPR

Morsetto porta catarifrangente,



HFL

Ruota libera, Combinata ad aghi



YGO

Ingranaggio dritto PRESTAZIONE, Acciaio 35NCD6



ETP

Maniglia e battuta per porta, Modulare



AT10-25ECO

Puleggia dentata di posizionamento tipo



PRF_ER

Elementi di giunzione, Elemento di raccordo



PLB

Distanziatore cilindrico, Ottone



GE32

Chiusura a leva rigida ad anello, Standard

Prodotti correlati



PT820

Pignone di trazione, Serie 820 e 815



PR820

Ruota di rinvio, Serie 820 e 815



CAP815

Catena a tapparella dritta, Stretta serie 815



DBL820

Rotella per catena, Serie 820 e 815