Magnetic lock for aluminium profile

Easily adjustable lock

PRF*SMA*

- ***Lock for sliding doors on systems assembled using PRF454545 aluminium profiles***
- *Material:*
  Handle - glass-fibre reinforced PA6
  Magnet - Neodymium
  Magnet - stainless steel
  Back plate - galvanised steel




Advantages

- *Easy front-mounting of the handle using M6 CHC screws and the counter plate using M5 FHC screws*
- *No drilling required*

Accessories

- **CHC6-16** *screws and* **PRF-ECL-M6** *square nut, not provided*
- **FHC5-12** *screws and* **PRF-ECL-M5** *square nut, not provided*

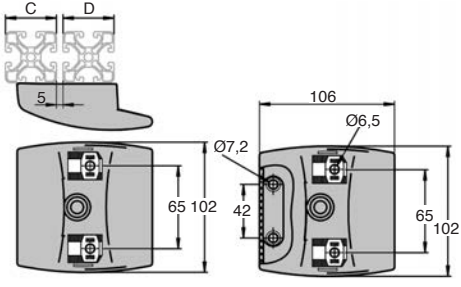

DISCOUNTS

Qty	1+	2+	5+
Disc.	Net	-5%	On request

Part N°	C	D	Holding force (N)	Weight (g)	Price each
PRF-SMA-102	30	38, 1.5" 40, 45, 50, 60	25	168	23,78 €
	40	38, 1.5" 40, 45, 50, 60			
	45	38, 1.5" 40, 45, 50			
	50	38, 1.5" 40, 45, 50			
	60	30, 38, 1.5" 40, 45			

All dimensions in mm

Altri prodotti...



Giunto Bowex ®, a dentatura bombata, Nylon



Chiusura a leva molla a trazione compensata, Standard



Cuscinetto a flangia quadrata in ghisa, Ghisa



Distanziatore cilindrico, Inox 303



Square decorative screwed hinges, carbon fibre reinforced



Supporto per estremità dell'albero, A soletta



Distanziatore esagonale, Acciaio



Ingranaggio elicoidale ad assi incrociati a 90°, Acciaio 20NCD2



Perno di fissaggio, con anello



Distanziatore esagonale, Inox 303



Riduttore a ruota e vite senza fine, fino a



Maglia rapida economica, Inox

Prodotti correlati



Vite a testa cava esagonale CHC, Acciaio classe 12.19



Fissaggio, Dado quadrato con linguetta - Acciaio



Vite a testa svasata piana, Inox A2 - DIN 7991



Profilato alluminio standard, 45 x 45 mm