






Advantages


- No maintenance required
- Low coefficient of friction
- Cost effective
- Robust
- Rigid
- Easily installed
- Wear resistant
- Materials:
 Sliding mechanism: iglidur®
 Ring: hard anodised aluminium
 Screws: stainless steel

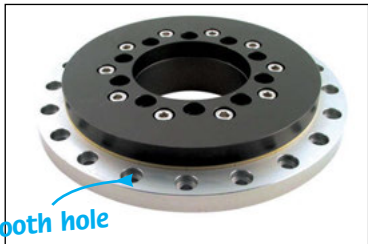

Tipping dependent on overturning torque


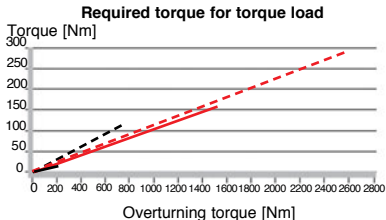



Required torque for eccentric loads

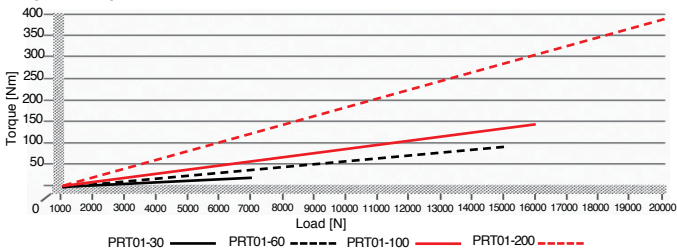

Part number	Weight (kg)	Axial load rating, static (N)	Axial load rating, dynamic (N)	Axial load rating, dynamic (N)	Radial load rating, dynamic (N)	Rotary speed limit, dry (1/min)	Rigidity, axial (N/μm)	Rigidity, radial (N/μm)	Max. permitted Overturning torque (Nm)	Dimensions in mm		
										R1	R2	B
PRT01-30	0,4	27 000	7 000	5 000	1 500	250	-	-	200	41	29,0	4,5
PRT01-60	1,1	50 000	15 000	10 000	3 000	200	300	65	800	65	51,5	4,5
PRT01-100	1,3	55 000	16 000	16 000	5 000	150	400	65	1 500	80	69,0	5,5
PRT01-200	3,2	100 000	30 000	35 000	10 000	80	500	65	3 800	137	123,0	7,0

Dimensions in mm

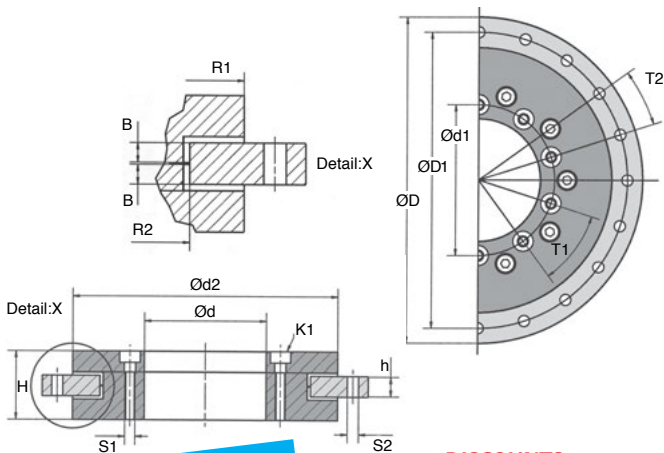

New sizes

DISCOUNTS

Qty	1+	5+	10+
Disc.	List	-5%	On request

Part number	ØD	ØD1	Ød1	Ød	Ød2	H	h	T1	T2	S1	S2	K1 for screw	Price each
													1 to 4
PRT01-20	80	70	31	20	60	24	8	3 x 120°	6 x 60°	M4	4,5	DIN 7984 M4	164,37 €
PRT01-30	100	91	42,5	30	82	29	10	8 x 45°	8 x 45,0°	M4	4,5	DIN 7984 M4	182,06 €
PRT01-50	150	135	65	50	120	33	10	8 x 45°	16 x 22,5°	M6	6,6	ISO 4762 M6	251,59 €
PRT01-60	160	145	74,0	60	130	33	10	10 x 36°	20 x 18,0°	M5	5,5	DIN 912 M5	274,50 €
PRT01-100	185	170	112,0	100	160	34	12	12 x 30°	16 x 22,5°	M5	5,5	DIN 912 M5	506,51 €
PRT01-150	250	235	165	150	220	35	12	12 x 30°	16 x 22,5°	M6	5,5	ISO 4762 M5	701,18 €
PRT01-200	300	285	215,0	200	274	38	15	12 x 30°	16 x 22,5°	M6	7,0	DIN 912 M6	903,83 €

Dimensions in mm

Altri prodotti...



BAG55

Anello di bloccaggio
inox, Inox




H02

Giunto cardanico
semplice ad aghi,
Sollecitazioni intense



AT5courroie

Cinghia chiusa
posizionamento AT,
AT5 Poliuretano
armatura in acciaio



M2

Ruota per vite senza
fine, Plastica lavorata
(delrin)



DOMI30

Kit di raccordo, Kit di
raccordo XY



PW_PWG25

Ruota di precisione,
Bronzo



ESCON

Accessori per
variante di velocità
5A, Kit 4 cavi motore
DC



PPG

Pistoncino a molla,
Con flangia di
fissaggio orizzontale



HCSS

Grano con punta a
coppa, punta a coppa



SVR20

Martinetto a vite - Vite
rotante, Con
madrevite esterna



BSCf


Manopola, Con coppia
regolabile



KKP-AR

Manicotto a sfere
inclinate, Carichi
elevati / -20° +200°

Prodotti correlati



PRT-TO

Corona girevole
Iglidur®, Con
dentatura esterna-
Iglidur®, allumini...