

Rigging screw with 2 jaws **stainless steel** **New Sta**

RDCss

Diameter M5 to M20


Rigging screw with 2 welded jaws

- Material : Stainless steel 316
- Supplied with fitted locking nuts

Application

The breaking strength is obtained by multiplying the SWL by a factor of safety of 4

NEW!

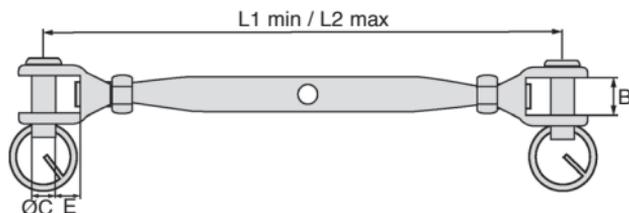

DISCOUNTS

Qty	1+	6+	20+	50+
Disc.	List	-10%	-20%	On request

Part number	Diameter	ØC	B	E	L1	L2	SWL (kg)	Weight (kg)	Price each 1 to 5
RDC-5/SS	5	5	10	8	126	190	150	0,056	15,45 €
RDC-6/SS	6	6	10	7,7	136	211	250	0,076	17,18 €
RDC-8/SS	8	8	11	9,4	170	255	360	0,154	24,20 €
RDC-10/SS	10	10	14,7	13,5	195	280	500	0,26	31,19 €
RDC-12/SS	12	12	15	22	260	380	650	0,536	43,05 €
RDC-14/SS	14	14	15	23	300	430	790	0,72	56,15 €
RDC-16/SS	16	16	21	24	315	455	980	1,086	80,89 €
RDC-20/SS	20	20	28	38	410	560	1300	2,124	119,88 €

Altri prodotti...



P55

Riduttore a ruota e vite senza fine, fino a 57 Nm



BOX-CS

Fascette di serraggio, Valigetta di fascette acciaio



BEAB

Manopola, stella, antibatterico



HBM

Guida su semi-binari, Boccola di regolazione



BAN

Connettore / supporto per profili alluminio, Universale



GEC

Chiusura a leva in gomma con aggancio, Bloccabile




SH2

Ingranaggio elicoidale ad assi paralleli, Acciaio 20NCD2



Gdal

Giunto cardanico doppio serie eco, Sollecitazioni leggere



T5courroie

Cinghia di posizionamento T, T5 Poliuretano armatura



YG3

Ingranaggio dritto PRESTAZIONE, Acciaio 35NCD6



SLB

Pistoncino a molla, acciaio classe 5.8



SH0

Ingranaggio elicoidale ad assi paralleli, Acciaio 20NCD2

Prodotti correlati



RDERSS

Tenditore, a serraggio manuale inox