

Rigging screw with 2 jaws **stainless steel** **New** **Sta**

RDCss

Diameter M5 to M20


Rigging screw with 2 welded jaws

- Material : Stainless steel 316
- Supplied with fitted locking nuts

Application

The breaking strength is obtained by multiplying the SWL by a factor of safety of 4

NEW!

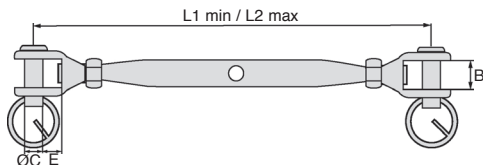

DISCOUNTS

Qty	1+	6+	20+	50+
Disc.	List	-10%	-20%	On request

Part number	Diameter	ØC	B	E	L1	L2	SWL (kg)	Weight (kg)	Price each 1 to 5
RDC-5/SS	5	5	10	8	126	190	150	0,056	15,45 €
RDC-6/SS	6	6	10	7,7	136	211	250	0,076	17,18 €
RDC-8/SS	8	8	11	9,4	170	255	360	0,154	24,20 €
RDC-10/SS	10	10	14,7	13,5	195	280	500	0,26	31,19 €
RDC-12/SS	12	12	15	22	260	380	650	0,536	43,05 €
RDC-14/SS	14	14	15	23	300	430	790	0,72	56,15 €
RDC-16/SS	16	16	21	24	315	455	980	1,086	80,89 €
RDC-20/SS	20	20	28	38	410	560	1300	2,124	119,88 €

Altri prodotti...



RTT

Calettatore di bloccaggio, Coppia media/elevata



PFM

Piede senza snodo, Lamiera modellata



PRF_SDD

Supporto per sensore Ø12, Ø12



PTRSS

Pignone tendicatena, Per ambienti aggressivi



MHMEP

Manovella ad impugnatura girevole, Prealesata




RVM25

Riduttore manuale, Rinvio angolare



AT5courroie

Cinghia chiusa posizionamento AT, AT5 Poliuretano armatura in acciaio



BAG-MI

Anello di serraggio con intaglio e maniglia a leva, Acciaio



BH01

Cuscinetto radiale flangiato, Montaggio :



JCSs

Giunto cardanico - inox, Sollecitazioni



BEAB

Manopola, stella, antibatterico



PENV

Maniglia da incasso, Ad avvitare

Prodotti correlati



RDERSS

Tenditore, a serraggio manuale inox