

Rigging screw with 2 jaws **stainless steel** **New Sta**

RDCss

Diameter M5 to M20


Rigging screw with 2 welded jaws

- Material : Stainless steel 316
- Supplied with fitted locking nuts

Application

The breaking strength is obtained by multiplying the SWL by a factor of safety of 4

NEW!

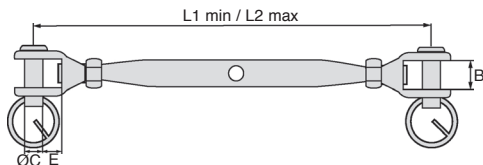

DISCOUNTS

Qty	1+	6+	20+	50+
Disc. List	-10%	-20%	On request	

Part number	Diameter	ØC	B	E	L1	L2	SWL (kg)	Weight (kg)	Price each 1 to 5
RDC-5/SS	5	5	10	8	126	190	150	0,056	15,45 €
RDC-6/SS	6	6	10	7,7	136	211	250	0,076	17,18 €
RDC-8/SS	8	8	11	9,4	170	255	360	0,154	24,20 €
RDC-10/SS	10	10	14,7	13,5	195	280	500	0,26	31,19 €
RDC-12/SS	12	12	15	22	260	380	650	0,536	43,05 €
RDC-14/SS	14	14	15	23	300	430	790	0,72	56,15 €
RDC-16/SS	16	16	21	24	315	455	980	1,086	80,89 €
RDC-20/SS	20	20	28	38	410	560	1300	2,124	119,88 €

Altri prodotti...



GE_ES_2RS

Snodo sferico,
acciaio/acciaio e
guarnizioni di tenuta



WS20

Binario Drylin® W,
Binario



SSG0

Ingranaggio dritto
Inox, Inox 304L



BHEX

Tappo di protezione
esagonale,
Tecnopolimero nero



CLG3

Ingranaggio dritto in
plastica stampata ,
Nylon stampato



GSI_A

Vite di regolazione per
molla a gas, Vite di
regolazione



CHAR7530

Cerniera a molla,
saldabile



ACM_AZ

Aggancio per tirante
chiusura in gomma,
Aggancio



FGWA

Supporto per
estremità dell'albero,
A soletta



RAM35

Riduttore manuale,
Rinvio angolare



LQT

Chiusura a sfera,
Chiusura rapida



LRR

Chiavistello con perno
prismatico, Lucchetto
a molla

Prodotti correlati



RDERSS

Tenditore, a serraggio
manuale inox