


Ideal for belts

TFR

- Suitable for mounting and positioning GTC belt rollers and PTR sprockets in a variety of positions
- Material:
Plated XC38 steel
304L stainless steel
- *Anti-rotation system

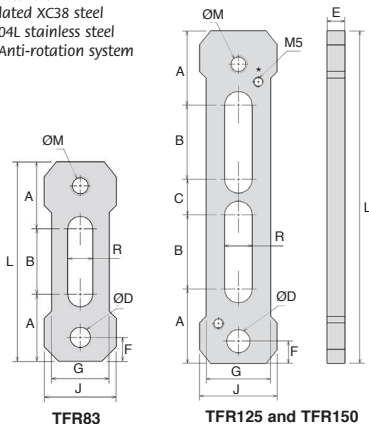


TFR83

TFR125 and TFR150



Typical application using GTC belt roller



Typical application using PTR sprocket

DISCOUNTS

Qty	1+	10+	25+	50+
Disc.	List	-5%	-10%	On request

Part number	A	B	C	ØD	E	F	G	J	L	ØM	R	Stock*	Price each 1 to 9
Steel version													
TFR83-8	28	27,5	-	8,5	8	10	24	30	83,5	M8	10,5	✓	12,31 €
TFR83-10	28	27,5	-	8,5	8	10	24	30	83,5	M10	10,5	✓	12,68 €
TFR125-8	28	27,5	14	10,5	8	10	24	30	125	M8	10,5	✓	13,18 €
TFR125-10	28	27,5	14	10,5	8	10	24	30	125	M10	10,5	✓	13,68 €
TFR125-12	28	27,5	14	10,5	8	10	24	30	125	M12	10,5	✓	14,43 €
TFR150-10	33,5	33,5	16	12,5	8	15	29	35	150	M10	12,5	✓	20,65 €
TFR150-12	33,5	33,5	16	12,5	8	15	29	35	150	M12	12,5	✓	21,15 €
TFR150-16	33,5	33,5	16	12,5	8	15	29	35	150	M16	12,5	-	21,89 €
Stainless version													
TFR83-8/SS	28	27,5	-	8,5	8	10	24	30	83,5	M8	10,5	-	19,41 €
TFR83-10/SS	28	27,5	-	8,5	8	10	24	30	83,5	M10	10,5	-	20,15 €
TFR125-8/SS	28	27,5	14	10,5	8	10	24	30	125	M8	10,5	-	24,38 €
TFR125-10/SS	28	27,5	14	10,5	8	10	24	30	125	M10	10,5	-	25,13 €
TFR125-12/SS	28	27,5	14	10,5	8	10	24	30	125	M12	10,5	-	26,87 €
TFR150-10/SS	33,5	33,5	16	12,5	8	15	29	35	150	M10	12,5	-	37,57 €
TFR150-12/SS	33,5	33,5	16	12,5	8	15	29	35	150	M12	12,5	-	38,07 €
TFR150-16/SS	33,5	33,5	16	12,5	8	15	29	35	150	M16	12,5	-	39,32 €


*Depending on availability - Dimensions in mm

Altri prodotti...



BOX-TOR-C

Valigetta di guarnizioni toriche in nitrile, 3.00 x 1.50mm a 30.20 x...



RPC

Ruota, Poliammide



HSSss

Vite a spalla di precisione inox ISO7379, Inox ISO 7379



BOX-TOR-D

Valigetta di guarnizioni toriche in nitrile, 18.00 x 2.00mm a 50.00 ...



DKGS

Giunto senza gioco Gerwah®, da 0.5 a 3Nm



SFE

Testa a snodo femmina, Inox / PTFE



CPAS

Asta snodata con fermo di sicurezza, Apertura verso l'altro



YG2

Ingranaggio dritto PRESTAZIONE, Acciaio 35NCD6



VRM

Anello di sollevamento, Orientabile femmina



CHM50

Riduttore a ruota e vite senza fine, fino a 107 Nm



ACL-PR

Elementi di giunzione, Collegamento a 90°



SBS_L

Giunzione per catena al metro, Maglia di giunzione - inox

Prodotti correlati



GTCSS

Rullo tendicinghia, Per ambienti aggressivi



PTRSS

Pignone tendicaten, Per ambienti aggressivi