


Ideal for belts

TFR

- Suitable for mounting and positioning GTC belt rollers and PTR sprockets in a variety of positions
- Material:
Plated XC38 steel
304L stainless steel
- *Anti-rotation system

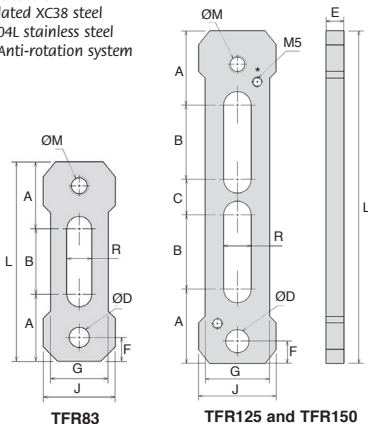


TFR83

TFR125 and TFR150



Typical application using GTC belt roller



Typical application using PTR sprocket

DISCOUNTS

Qty	1+	10+	25+	50+
Disc.	List	-5%	-10%	On request

Part number	A	B	C	ØD	E	F	G	J	L	ØM	R	Stock*	Price each 1 to 9
Steel version													
TFR83-8	28	27,5	-	8,5	8	10	24	30	83,5	M8	10,5	✓	12,31 €
TFR83-10	28	27,5	-	8,5	8	10	24	30	83,5	M10	10,5	✓	12,68 €
TFR125-8	28	27,5	14	10,5	8	10	24	30	125	M8	10,5	✓	13,18 €
TFR125-10	28	27,5	14	10,5	8	10	24	30	125	M10	10,5	✓	13,68 €
TFR125-12	28	27,5	14	10,5	8	10	24	30	125	M12	10,5	✓	14,43 €
TFR150-10	33,5	33,5	16	12,5	8	15	29	35	150	M10	12,5	✓	20,65 €
TFR150-12	33,5	33,5	16	12,5	8	15	29	35	150	M12	12,5	✓	21,15 €
TFR150-16	33,5	33,5	16	12,5	8	15	29	35	150	M16	12,5	-	21,89 €
Stainless version													
TFR83-8/SS	28	27,5	-	8,5	8	10	24	30	83,5	M8	10,5	-	19,41 €
TFR83-10/SS	28	27,5	-	8,5	8	10	24	30	83,5	M10	10,5	-	20,15 €
TFR125-8/SS	28	27,5	14	10,5	8	10	24	30	125	M8	10,5	-	24,38 €
TFR125-10/SS	28	27,5	14	10,5	8	10	24	30	125	M10	10,5	-	25,13 €
TFR125-12/SS	28	27,5	14	10,5	8	10	24	30	125	M12	10,5	-	26,87 €
TFR150-10/SS	33,5	33,5	16	12,5	8	15	29	35	150	M10	12,5	-	37,57 €
TFR150-12/SS	33,5	33,5	16	12,5	8	15	29	35	150	M12	12,5	-	38,07 €
TFR150-16/SS	33,5	33,5	16	12,5	8	15	29	35	150	M16	12,5	-	39,32 €

*Depending on availability - Dimensions in mm

Altri prodotti...



BOX-TOR-B

Valigetta di guarnizioni toriche in nitrile, 20.38 x 1.78mm a 50.16 ...



WJUM16

Pattino Drylin® W, Pattino



PWC

Inserti filettati, Kit Powercoil - con o senza attrezzo di posa




NCT

Giunto di collegamento, Ad angolo fisso



Gal-cardan

Giunto cardanico semplice serie eco, Sollecitazioni leggere



LAT1

Attuatore lineare a motore 1A, 1 ampere



FBL4004_K32

Spazzola al metro, Polipropilene nero striato (PP)



BPM-Z

Pressore a molla con intaglio e puntale a sfera, Corpo plastica + sf...



AT5M AT10M

Cinghia aperta al metro tipo AT, AT10



CHAuss

Cerniera ad avvitare, 270°



PTAF100-PAMF100

Piede fissabile con base lamiera Ø100, Ø



PPF

Pistoncino a molla, con flangia

Prodotti correlati




GTC

Rullo tendicinghia, Per applicazioni correnti



PTR

Pignone tendicateni, Per applicazioni correnti



PTR

Pignone tendicateni, Per applicazioni correnti