

Locking castor with central hole



RIM

For loads up to 1000kg



- A combination of a swivel castor and an adjustable locking support
- Used to easily support and moving machines or other heavy equipment and then positioning them in a very stable manner.
- Installation starts by lowering the locking support using a nut.
- With the wheel no longer resting on the ground, the supported unit can be levelled despite any irregularities in the floor.
- Operating temperature range: -30 to +80°C

Materials

- Polyamide central control cross nut
- Anti-skid rubber mount allowing absorption of vibration and noise
- Body: Moulded cast aluminium body, hammered ivory paint finish
- Swivel system provided by 2 ball rings
- Mounting plate has a threaded central hole, threaded rod and nut supplied.
- Wheel: Black polyamide Shore D 70



Adjusting nut

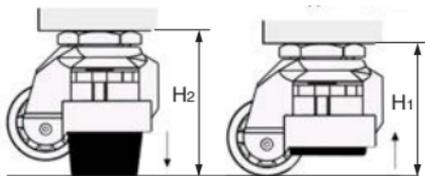

DISCOUNTS

Qty	1+	5+	14+
Disc.	List	-5%	On request

Part number	ØA	B	H1	H2	ØT	Swivel interference ØK	Load (kg)	Price each 1 to 5
RIM42-60/TCE	42	20	71	81	M8	84	60	44.77 €
RIM50-280/TCE	50	25	82	92	M12	101	280	71.10 €
RIM63-550/TCE	63	28	103	118	M12	125	550	96.62 €
RIM75-800/TCE	75	30	120	132	M16	142	800	106.81 €
RIM75-1000/TCE	75	30	120	132	M16	142	1000	127.36 €

Dimensions in mm

Altri prodotti...




GB-RA

Ingranaggio dritto
ottone, Ottone
CuZn39Pb3



GB-RA

Ingranaggio dritto
ottone, Ottone
CuZn39Pb3



H1

Ingranaggio elicoidale
ad assi incrociati a
90°, Plastica lavorata



VCMB

Vite di giunzione
metallo/legno, Inox



PRF-SCREEN-5

Screen support,
Support with 5 axes of
rotation



OP3

Indicatore di posizione
digitale (N. di giri), 4
cifre



ACL-PL

Elementi di giunzione,
Piastra di fissaggio -
86x86 mm



SBS_L

Giunzione per catena
al metro, Falsa maglia
- inox




ZBRA

Ingranaggio conico in
plastica, 1:1



PRF_CH

Catena porta cavo,
Supplied in metre
lengths



Q3

Cuscinetto a doppia
corona di sfere,
Obliquo - Acciaio



AT5M AT10M


Cinghia aperta al
metro tipo AT, AT5
Poliuretano armatura
in acciaio

Prodotti correlati



RIMple

Ruota di livellamento,
Con piastra



PDR-RD

Piede con ruota
integrata, Ruota
disassata